

# D407-LED

## 15" Decorative Round Luminaire



### Job Information


Type:

Catalog #:

Project:

Comments:

Prepared by:

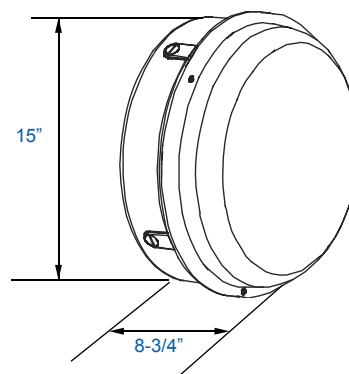

### Description

The 15" round decorative luminaire is designed for durability and performance to withstand today's toughest environments, including schools, parking garages, office complexes and any other application prone to vandalism.

### Ordering Information

Example: (D407-LED-20-50-UNV-W-O-BZ-WDF)

D407-LED [ ] [ ] [ ] [ ] [ ] [ ] [ ] [ ]

Series	Wattage/Lumen	Color Temp.	Voltage	Lens	Guard	Finish	Option
15" Decorative Round Luminaire	25 25W/3005 <sup>3</sup>	50 5000K <sup>1</sup>	UNV 120-277V 347 347V 480 480V (Step-Down Transformer used for 480V Divider)	W White Frosted C Prismatic Clear Prismatic	O Open C Cross E Eyelid	BZ Bronze <sup>1</sup> BL Black WH White CU Custom <sup>2</sup>	PC Photocell SP Surge Protection

<sup>1</sup> Standard for fixture

<sup>2</sup> Contact factory for custom finish

<sup>3</sup> Delivered Lumens (with Open Guard).

### Features

- Mounts directly over a 4" recessed outlet box, or use a 1/2" surface conduit.
- Guards are available in three styles: Open, Cross and Eyelid.
- An extruded lens and foam backplate gasket are factory installed to cushion against shock. This also provides a seal against moisture, dirt and insects from entering the luminaire.
- Housing finish is textured polyester powder coating.
- Guards and housing are available in four finishes: White, Bronze, Black.
- The deep casting is provided with 1/2" threaded conduit coin plugs.
- UV stabilized heat and shock resistant borosilicate glass.
- Available in clear or frosted white, both with radial prisms to provide superior illumination.
- CSA listed for wet locations.


### Performance Data

CRI:	85
CCT:	5000K
Warranty:	10 yr. Limited Warranty
Dimming:	Available with 0-10V inputs dimming down to 10%
Operating Temperature:	-40° to 40°C Max Ambient
L70 Rating:	100,000+ Hours
IP Rating:	IP65
Drive Current:	350mA
Sound Rating:	Class A (inaudible in a 24dB ambient environment)


### Guard Options



← **Cross** →

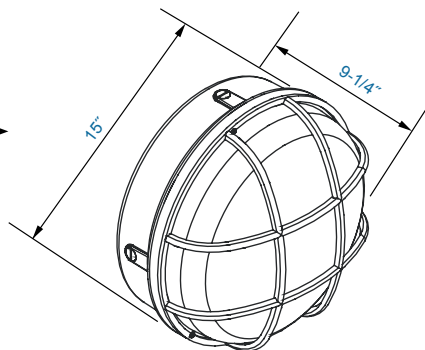

← **Eyelid** →



### Other Dimensions