



DECO® | LIGHTING



D410-LED

Low Profile Entry Light



Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

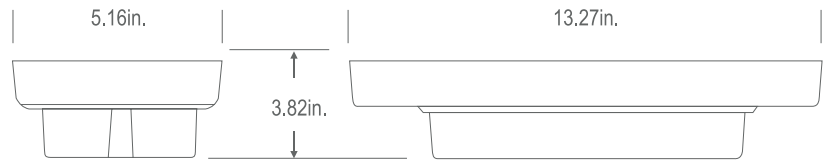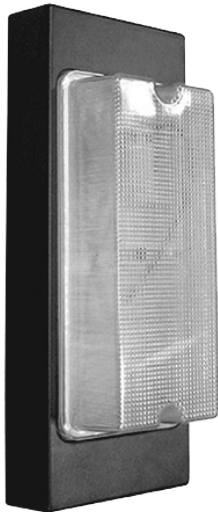

Description

The D410 -LED is constructed of premium die-cast aluminum and features a polycarbonate lens that delivers excellent beam control. Ideal for parking areas, entrances, walkways, underpasses, loading docks, recreation areas.

Features

- High impact prismatic polycarbonate lens
- Corrosion-resistant die cast aluminum housing
- Mounts directly over a recessed electrical box
- One piece anodized aluminum designed reflector for best light efficiency.
- Silicone rubber included to prevent any leakage from the outside.
- CSA listed for wet locations.
- .5" tapped holes available for installing photocell.
- Standard color is bronze; also available in black and white. Contact factory for custom finishes.
- Approx. Weight: 10 lbs.

Ordering Information

Example: (D410-LED-20-50-UNV-ELED)



Series	Wattage/Lumen	Color Temp.	Voltage	Finish	Option
Low Profile Entry Light	10 10W/1150 ³	30 3000K	UNV 120-277V	BZ Bronze ¹	ELED Emergency LED secondary source batter pack (-4° F min. operating temp)
	15 15W/1650 ³	35 3500K	347 347V	BL Black	
	20 20W/2200 ³	40 4000K	480 480V	WH White	
		50 5000K ⁴	(Step-Down Transformer used for 480V Divider)	CU Custom ²	

¹Standard for fixture
²Contact factory for custom finish
³Delivered Lumens (5000K) - Multiple by 0.98 for 4000K, 0.95 for 3500K, and 0.90 for 3000K
⁴Standard Color Temp.

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2016 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
 Rev Date: 12/19/16 #2



Digitize your light.®