
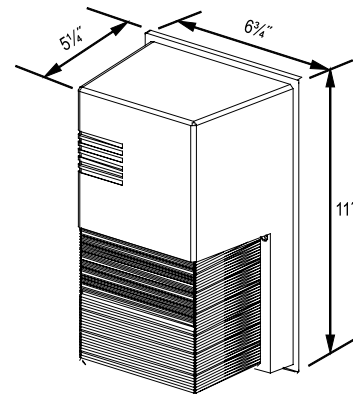


D411-LED

Polycarbonate Mini Wall Light

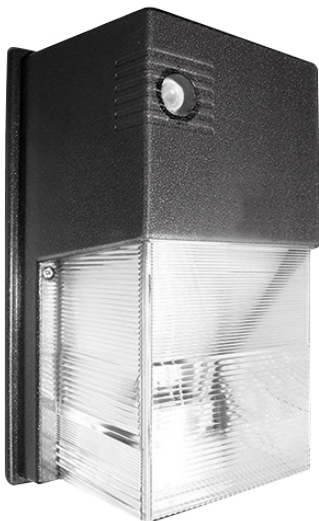

Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

Description

The D411-LED polycarbonate wall pack's compact design is ideal for office buildings, homes, townhouses, storage buildings, and restaurants.

PLEASE NOTE: Includes button style photocell (120V only)

Features

- Injection molded polycarbonate lens.
- Silicone gasketed for extra protection against moisture.
- Mounts easily to a 4" octagonal box or to a 4S box.
- Back plate is die cast aluminum.
- CSA Listed for wet locations, IP54
- Dark bronze polyester powder coated finish for impact, corrosion and UV resistance.
- Great for low entry light applications.
- Standard color is bronze; also available in black, white, and gray.
- Approx. Weight: 10 lbs.
- 120V Button Style Photocell Standard


Ordering Information

Example: (D410-LED-14-50-120-BZ)

D411-LED					
Series	Wattage/Lumens		Color Temp.	Voltage	Finish
Medium LED Wall Pack	14	14W/1054 ²	50 5000K ¹	120 120V	BZ Bronze ¹ BL Black WH White GY Gray


¹Standard for fixture
²Delivered Lumens

Photometric Data

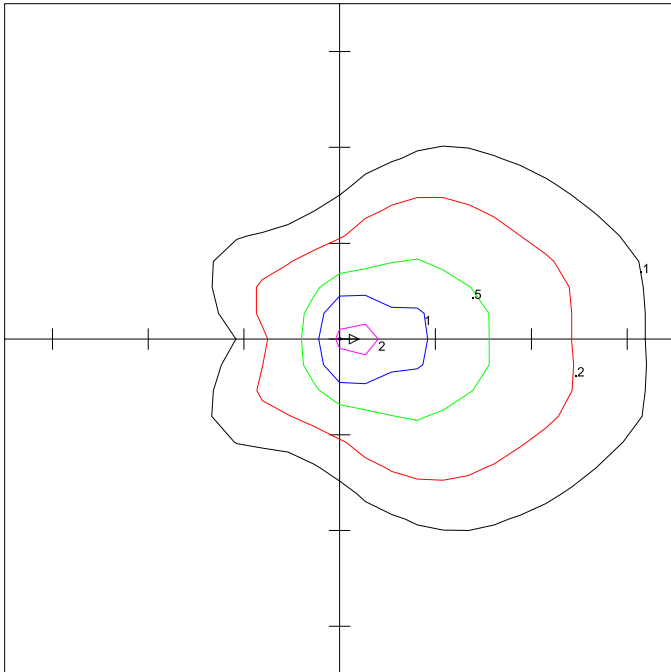

DECO LIGHTING, LLC
D411-LED-14-50K-UNV
11"L X 6.75"W X 5.25"DEPTH, LED WALL FIXTURE
13W S561 LED ARRAY

Horizontal Footcandles
Scale: 1 Inch = 10 Ft.
Light Loss Factor = 1.00
Lumens Per Lamp = N.A. (absolute photometry)
Luminaire Lumens = 1054
Mounting Height = 8.00 Ft
Maximum Calculated Value = 2.56 Fc
Arrangement: Single

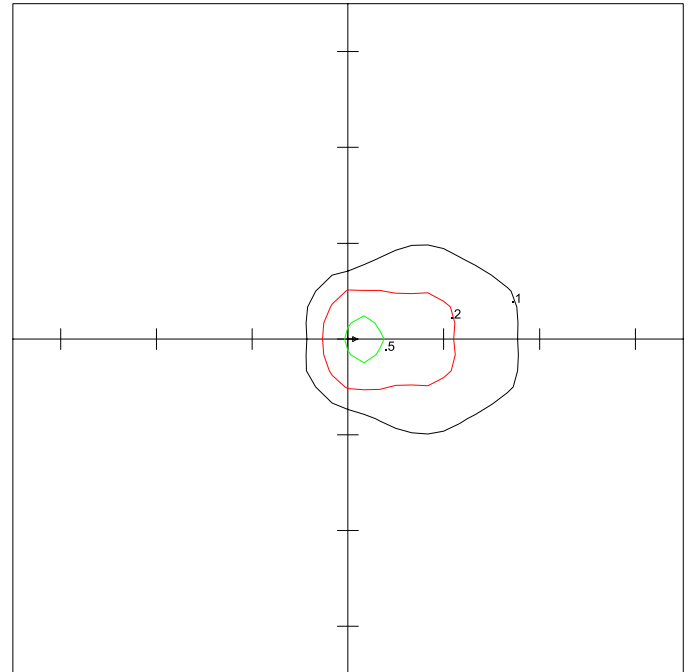

DECO LIGHTING, LLC
D411-LED-14-50K-UNV
11"L X 6.75"W X 5.25"DEPTH, LED WALL FIXTURE
13W S561 LED ARRAY

Horizontal Footcandles
Scale: 1 Inch = 20 Ft.
Light Loss Factor = 1.00
Lumens Per Lamp = N.A. (absolute photometry)
Luminaire Lumens = 1054
Mounting Height = 16.00 Ft
Maximum Calculated Value = 0.72 Fc
Arrangement: Single

Performance Data

CRI:	84		
CCT:	5000K		
System Wattage:	14.1 watts		
Warranty:	10 yr. Limited Warranty		
Dimming:	0-10V Dimming Standard		
Operating Temperature:	-40° to +40°C Max Ambient		
L70 Rating:	100,000+ Hours		
IP Rating:	IP54		
Driver Current:	700mA		
Sound Rating:	Class A (inaudible in a 24dB ambient environment)		
BUG Rating:	B0	U3	G2

Mounting Holes

Fixture housing requires mounting holes to be drilled by the installer. This is done by attaching the included foam gasket to the housing, and using the gasket as a template to drill the desired holes.

