


D415-LED

Designer Square Wall Light

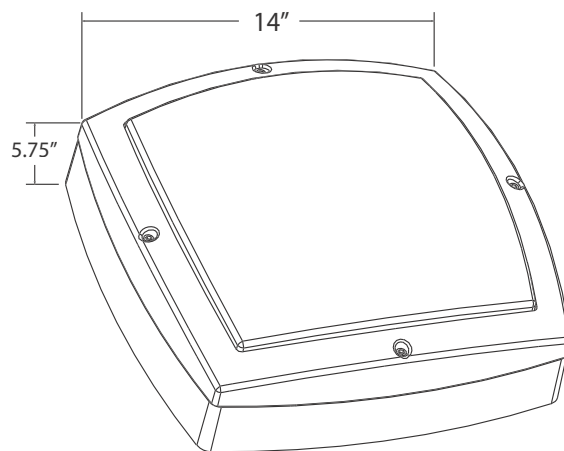

Job Information

Type:

Catalog #:

Project:

Comments:

Prepared by:

Description

Contemporary low profile architectural wall scone is designed for durability and performance to withstand today's toughest environments. The D415-LED features rounded-square shape and choice of full, eyelid or grid frame lens designs. Rugged die-cast aluminum two piece, fully gasketed housing with vandalproof fasteners and impact resistant opalescent polycarbonate lens. Durable weatherproof polyester powder coat finish makes this luminaire suitable for many areas including schools, parking garages, office complexes and any other application prone to vandalism.

Ordering Information

Example: (D415-LED-20-30-UNV-E-BZ-WDF)

D415-LED													
Series		Wattage/Lumen		Color Temp.		Voltage		Guard		Finish		Option	
Designer Square Wall Light	20	20W/2560 ³		30	3000K	UNV	120-277V	O	Open	BZ	Bronze ¹	WSF	Wired Single Fuse
	30	30W/3840 ³		35	3500K	347	347V	C	Cross	BL	Black	WDF	Wired Double Fuse
	40	40W/5120 ³		40	4000K	480	480V	E	Eyelid	WH	White	EM	Emergency Ballast
	60	60W/7620 ^{3,5}		50	5000K ⁴	(Step-Down Transformer used for 480V Divider)							

¹ Standard for fixture

² Contact factory for custom finish

³ Initial Delivered Lumens

⁴ Standard Color Temp.

⁵ 60W is only available with O (open) and C (cross). Not available for E (eyelid)

Features

- Die cast aluminum housing & front frame.
- Powdercoat finish over a chromate conversion coating.
- Opalescent polycarbonate lens.
- Available with open, half-cutoff, and grid-style frame.
- Max 60 wattage.
- Optional battery backup.
- CRI: 80+.
- 10 yr limited warranty.

Guard Options

