


D510-LED

Direct/Indirect Parking Garage Luminaire

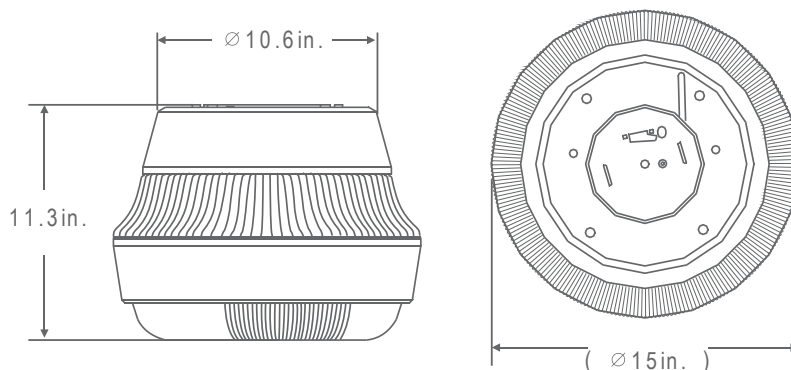

Job Information

Type:

Catalog #:

Project:

Comments:

Prepared by:

Description

The D510-LED combines strength-gaining design with energy saving technology. Architecturally angled facets with radius corners provide an even distribution of light ideal for parking garage applications.

Features

- Rugged, die-cast aluminum housing with one piece silicone gasket.
- Precision injection-molded, UV stabilized acrylic lens. Hinged and secured with four stainless steel screws
- Fully silicone gasketed, galvanized steel mounting plate. Mounts to recessed box or pendant mounts to industry standard J-boxes.
- Lower segmented, anodized aluminum and upper precision, injection molded, prismatic acrylic refractor
- Approx. Weight: 15 lbs
- Standard color is white; also available in black and bronze. Contact factory for custom finishes
- UL Listed for wet location
- CRI: 80+
- 10 Year Limited Warranty

Ordering Information

Example: (D458-LED-40-50-UNV-BZ-WSF)

D510-LED									
Series	Wattage/Lumen		Color Temp.		Voltage		Finish		Option
Direct/Indirect Parking Garage Luminaire	20	20W/2030 ³	30	3000K	UNV	122-277V	BZ	Bronze	PC Photocell
	30	30W/3045 ³	35	3500K	347	347V	BL	Black	WSF Wired Single Fuse
	40	40W/4060 ³	41	4100K	480	480V	WH	White ¹	WDF Wired Double Fuse
	60	60W/6090 ³	50	5000K ¹	(Step-Down Transformer used for 480V Divider)		CU	Custom ²	

¹ Standard color for this fixture
² Contact factory for custom finish
³ Delivered Lumens (5000K)