



DECO® | LIGHTING


D533R-LED

Recessed LED Canopy Light



Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

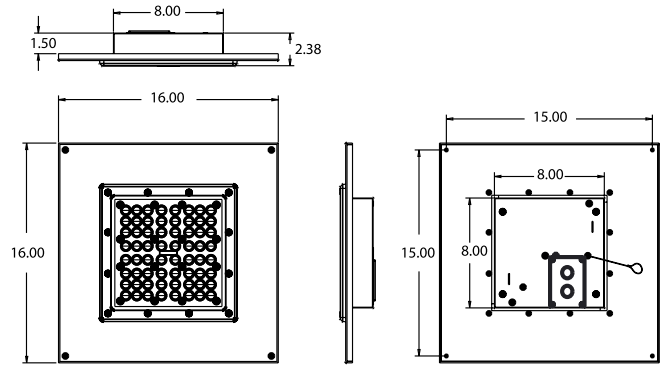

Description

The low-profile design of the D533R-LED is ideally suited for security, covered entry ways, and soffit installation applications. The durable and robust design allows for universal recessed mount compatibilities. Delivering between 4288 and 6161 lumens while consuming between 40 and 60 watts, it's the ideal low-power utility light.

Features

- UV stabilized, one-piece polycarbonate lens
- Universal voltage
- Powder coated aluminum housing
- Robust design for superb durability
- Standard 0-10V dimming included
- Suitable for Wet Locations Covered Canopy

Ordering Information

Example: (D533R-LED-40-50-UNV-SL)

D533R-LED

Series	Wattage/Lumen	Color Temp.	Voltage	Finish
Recessed LED Canopy Light	40 40W/4498 ² 60 60W/6161 ²	40 4000K 50 5000K ¹	UNV 120-277V	WH White ¹ SL Silver

¹ Standard for this fixture

² Delivered Lumens (5000K) - For 4000K multiply by 0.95

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2016 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
Rev Date: 10/21/16 #1



Digitize your light.®