


# DLED-FRET

## Surface Mount Retrofit-Kit



### Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

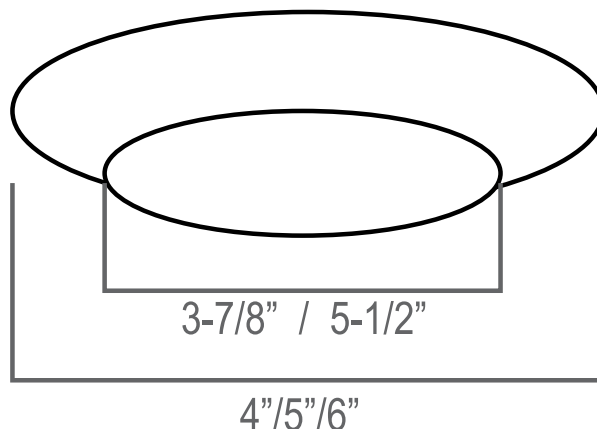

### Description

The DLED-FRET retrofit kit provides energy-saving performance with interior design aesthetics in mind. With warm color temp options, this surface-mount fixture provides comfortable illumination for today's modern interior spaces. From private offices and reception areas to luxury retail and more, the DLED-FRET upgrades existing interior lighting to energy-saving LED technology.

### Ordering Information

Example: (DLED-FRET-4-12-35-120-WH-RM)

DLED-FRET

Series	Size	Wattage/Lumen	Color Temp.	Voltage	Finish	Mounting
Surface Mount Retrofit Kit	4 4"	12 12W/1060 <sup>2</sup>	27 2700K	120 120V	WH White	RM Recessed Mount
	6 6" <sup>1</sup>	15 15W/1240 <sup>2</sup>	30 3000K			
			35 3500K			
			40 4000K			

<sup>1</sup> Can be used as 5" & 6"

<sup>2</sup> Delivered Lumens (4000K)

### Features

#### Electrical Connection

- 120V AC LED module with integrated IC chip embeded on board 10-100% triac dimming with most of leading a trailing edge triac dimming switches in the market.
- Patented driving circuit to prevent inrush current affecting dimmer switch and module and module.
- Recommended use maximum 30 lamps per run of 600W of loaded dimmer switches and 15 lamps per dimmer switches of 300W of load.
- Available 2700K, 3000K, 3500K, 4000K color temperature.
- Optional transformer (TL27-12) to convert to 120V from 277V input.
- CRI: 80

- J-Box Mounting is standard.

#### Warranty

- 100,000 hrs rated fixture lifetime

#### Listing

- CA Title 24
- 90 CRI
- CSA-us Cerificated
- Wet location listed

### Lumen Output

Lumen Chart				
Wattage	4000K	3500K	3000K	2700K
12	1060	1007	982	957
15	1240	1178	1149	1120

\*Lumen outputs are based on the 4000K performance data and then scaled down to the other temperatures.

### Mounting Options

Recessed Mounting  
For 4"



For 5" and 6"



J-Box Mounting

