




Project: Date:

Prepared by:

Comments:

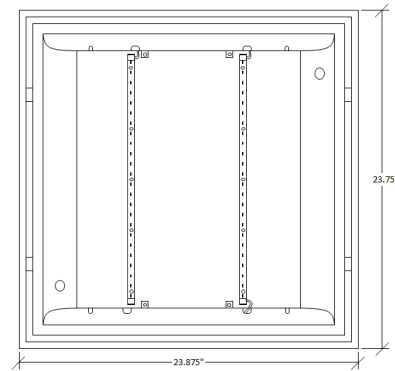

FEATURES

- 5 Year Warranty
- Direct Replacement for **2x2 Fluorescent Troffers**
- Energy Savings of up to 30%
- CRI 81
- Lumen Maintenance over 70% @ 50,000+ Hours
- Dimmable 0-10V
- No UV/IR Radiation, No Toxic Mercury
- Additional Kelvin Temperatures Available

APPLICATIONS

- Dropped Ceiling Application for General Lighting in Offices Facilities
- Retail Store Lighting
- Museums, Galleries, Showrooms
- Hotels, Hospitality Areas
- Hospitals, Clinics, Workrooms
- Corridors, Lobbies, Stairways, Conference Rooms
- School, College, University Lighting

OPTICS

- Die Formed of 24 Gauge Post Painted Steel
- Prismatic Lens
- Positive Locking Cam Latches
- No Exposed Fasteners

CERTIFICATIONS

- cULus Listed
- DLC Listed for Rebate and Tax Incentive Programs
- Lighting Facts Listed

SPECIFICATIONS

Part Number: **EVTR22BL20PD2**

Warranty: 5 Years
 Kelvin Temperature (CCT): 4000K
 Wattage: 24.5 W
 Lumens: 2200 lm
 Efficacy 89.8 lm/w
 CRI: 81
 Dimmable: 0-10v Dimming
 Input Voltage: AC 120~277V

Certifications: UL Listed
 DLC Listed: Yes
 Expected Life: 50,000 hrs
 Max. Ambient Temperature: 113 F
 Min. Ambient Temperature: 0 F
 Power Factor: 0.90
 THD: <20%

TECHNICAL

Warranty:	5 Years	Max. Ambient Temp:	45C	R-Value:	50	LED Beam Angel:	120 deg.
Expected Life:	50,000 hrs	Min. Ambient Temp:	-18C	Power Factor:	0.90	THD:	<20%






Project: Date:

Prepared by:

Comments:

LINE DRAWINGS

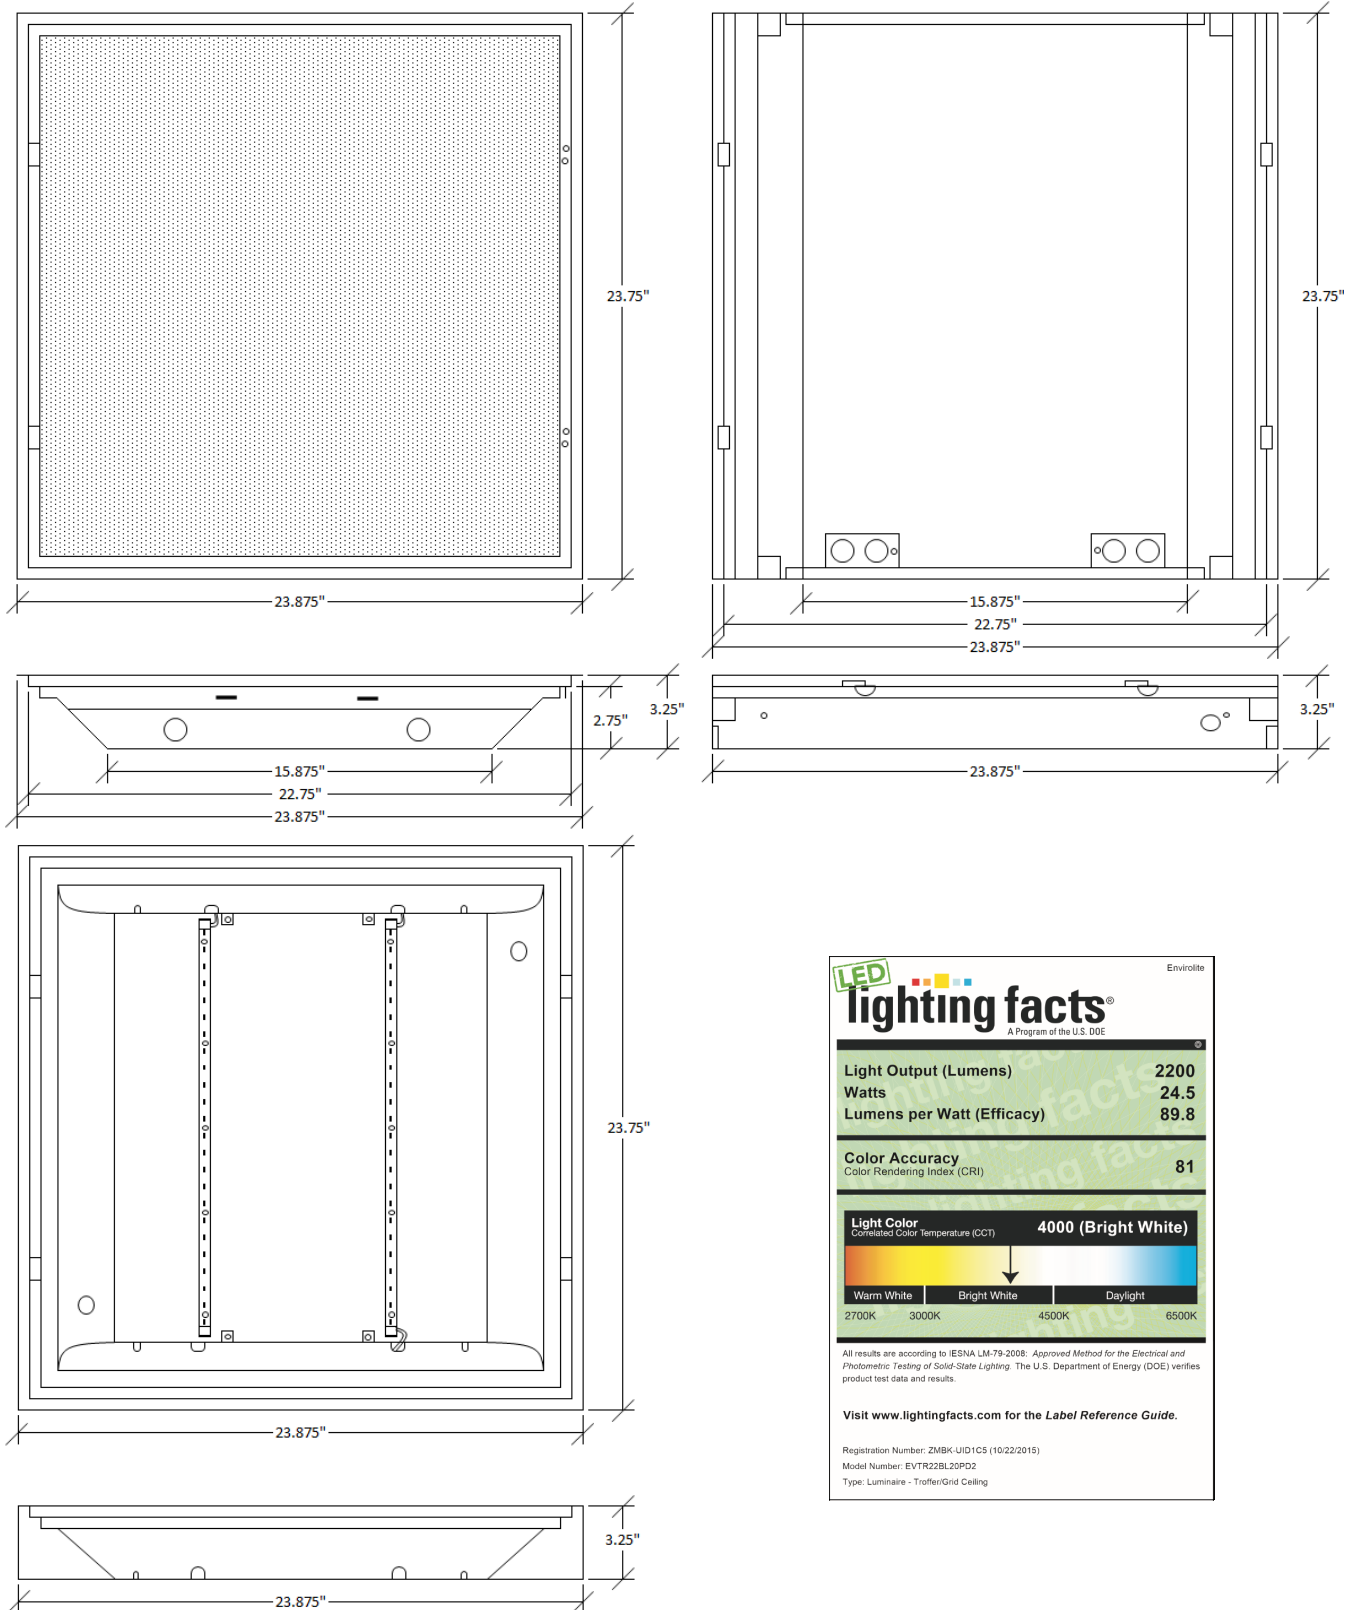

LED lighting facts
A Program of the U.S. DOE

Light Output (Lumens)	2200
Watts	24.5
Lumens per Watt (Efficacy)	89.8
Color Accuracy Color Rendering Index (CRI)	81
Light Color Correlated Color Temperature (CCT)	4000 (Bright White)

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: ZMBK-UID1CS (10/22/2015)
Model Number: EVTR22BL20PD2
Type: Luminaire - Troffer/Grid Ceiling