




# R Series - 3RSS/4RSS

## 3" and 4" Suspended Direct Lighting Linear System

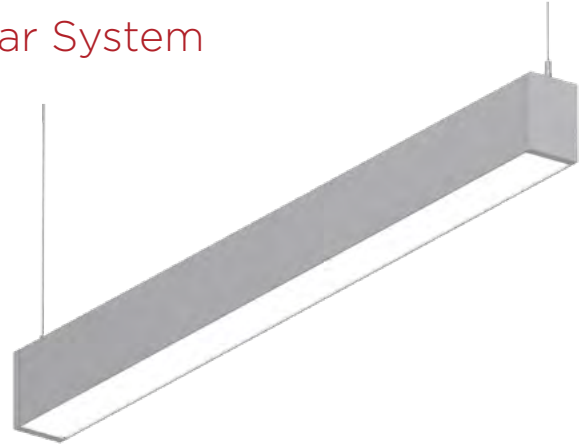

OVERVIEW	
Lumen Range	600 - 1,300
CCT	2700K, 3000K, 3500K, 4000K, 5000K
Wattage Range	22 - 48
Efficacy Range (LPW)	107 -118
Weight lbs (kg)	3 lbs/ft (1.3 kg/ft)

### QUICK LINKS

[Ordering Guide](#)[Performance](#)[Photometrics](#)[Dimensions](#)

### FEATURES & SPECIFICATIONS

#### Construction

- Rigid extruded aluminum housing for consistency and strength
- Die Cast Aluminum End Caps
- Available in varying lengths from 2' to 8' for individual or continuous row mounting
- Seamlessly create a variety of shapes with straight and corner units
- Housing is treated with phosphate rust inhibitor and painted with textured powder coat paint.
- Manufactured in the USA

#### Optical System

- High transmission snap-in impact resistant diffuse acrylic lens
- Minimum CRI of 82
- RSS is direct light only
- For additional indirect lighting please refer to RDI model

#### Electrical

- High-performance driver features over-voltage, under-voltage, short-circuit and over temperature protection.
- 0-10V dimming (1% - 100%) standard.
- Standard Universal Voltage (120-277 Vac) Input 50/60 Hz or optional High voltage (347 Vac).
- L70 Calculated Life: >100k Hours
- Total harmonic distortion: <20%

- Operating temperature: - -40°C to +40°C (-40°F to +104°F)
- Power factor: >.95
- Input power stays constant over life.
- Factory pre-wired to section ends with quick-wire connectors
- Optional 120-277V 12W integral emergency battery pack is available to meet critical life-safety lighting requirements. The 90-minute batteries provide constant power to the LED system, ensuring code compliance. A test switch/indicator button is installed beneath the snap in lens mounted to the reflector.

#### Controls

- Optional integral passive infrared occupancy sensor available
- Optional integral daylight harvesting sensor available

#### Installation

- Quick connect harness to attach fixtures in continuous rows
- Hanger bracket to provide hanging support between fixtures
- Alignment guides to ensure proper alignment from fixture to fixture
- Power access on top of fixtures
- Single point adjustable length 1/16" diameter cable for mounting to suspended or hard ceilings
- Stem mounting option available

- 5" diameter powder coated steel canopy for power feed locations
- 2" diameter powder coated steel canopy for non-feed locations

#### Warranty

- Complete warranty terms located at: <https://www.lsi-industries.com/resources/terms-and-warranty.aspx>.
- 1 Year warranty on optional Battery Backup. Test regularly in accordance with local codes.

#### Listings

- List for UL 1598 and UL 8750
- RoHS Compliant
- Suitable for damp locations
- Meets Buy American Act requirements
- State of California Title 24 compliant
- DLC qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.




## ORDERING GUIDE

[Back to Quick Links](#)


TYPICAL ORDER EXAMPLE: **3RSS 4 LED 06L LF UE 40 WHT**

Prefix	Length	LED Technology	Direct Lumens (Per Foot)	Lens	Voltage	Color Temperature	Fixture Color	Options
3RSS - 3" Width Direct	2 - 2' Length <sup>1</sup>	LED	06L - 600 Lumens 10L - 1,000 Lumens 11L - 1,100 Lumens 13L - 1,300 Lumens	LF - Frosted Diffuse	UE - Universal Voltage (120V-277V)	27 - 2700K <sup>2</sup> 30 - 3000K 35 - 3500K 40 - 4000K 50 - 5000K <sup>2</sup>	WHT - White BLK - Black MSV - Silver RAL - Custom Color (specify i.e. RAL829)	OCC - Occupancy Sensor DAY - Daylight Sensor DOC - Daylight and Occupancy Sensor EM - Emergency Battery Pack <sup>3</sup> EC - Emergency Circuit <sup>3</sup> EH - Emergency Through Harness <sup>4</sup> F - Fast Blow Fuse GMF - Slow Blow Fuse ST - Stem Mount
	3 - 3' Length							
4RSS - 4" Width Direct	4 - 4' Length							
5 - 5' Length								
6 - 6' Length								
7 - 7' Length								
8 - 8' Length								
CHO - Horizontal 2'x2' Corner								

### Example of a typical fixture application with hardware



- Includes:**
- Fixture
  - Feed Kit (SFK)
  - Non-Feed Kit (NFK)
  - End Plate Kit (EP - Contains 2)

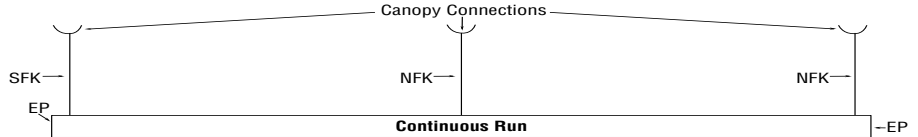

- Includes:**
- Fixtures
  - Feed Kit (SFK)
  - Non-Feed Kit (NFK)
  - End Plate Kit (EP - Contains 2)

## ACCESSORY TABLE

TYPICAL ORDER EXAMPLE: **SFK SP SC 9C FA 36 UE W W**

Prefix	Fixture Attachment	Feed Cord	Ceiling Attachment	Cable Suspension Type	Cable Suspension Length	Stem Length
SFK - Starter Feed Kit	SP - Single Point Cable	SC - Straight	HC - Hard Ceiling	FA - Fully Adjustable	18 - 18" Max	12
EFK - Emergency Circuit Feed Kit	S - Stem Mount	Blank - None			24 - 24" Max	15
NFK - Non-Feed Kit					36 - 36" Max	18
SMP - Stem Power Feed Kit					72 - 72" Max	24
SMNP - Stem Non Feed Kit					144 - 144" Max	
SMPE - Stem Mount with Emergency Feed Kit						

Line Voltage	Cord Color	Canopy Color	Dimming
UE - Universal Voltage (120-277V) 347 - 347V	W - White B - Black S - Silver	W - White B - Black S - Silver RAL - Custom Color (specify i.e. RAL829)	DIM2 - Dimming wires pulled in feed kit <sup>5</sup>

## ENDPLATES

Fixture Series	Width	Description
3RSS - EP	3"	Cable Mount Endplate kit (2 per)
4RSS - EP	4"	Cable Mount Endplate kit (2 per)
3RSS - SEP	3"	Stem Mount Endplate kit (2 per)
4RSS - SEP	4"	Stem Mount Endplate kit (2 per)

### Notes:

- 1 - Sensor options not available for this length
- 2 - Adds 1 week to published lead time
- 3 - Requires EFK Hardware Accessory
- 4 - EH is required if emergency circuit traverses multiple fixtures
- 5 - Only valid with SFK. Not available with Emergency Feed Kit.





## PERFORMANCE

[Back to Quick Links](#)

DELIVERED LUMENS PER FOOT - 4' FIXTURE						
Size	Output	3000K	3500K	4000K	5000K	Wattage
3"	06L	604	613	634	653	5.7
	10L	919	934	965	993	8.7
	11L	1,078	1,095	1,132	1,165	10.4
	13L	1,222	1,242	1,283	1,321	12.0
4"	06L	630	640	662	681	5.7
	10L	962	979	1,010	1,040	8.7
	11L	1,127	1,147	1,184	1,220	10.4
	13L	1,280	1,300	1,344	1,383	12.0

\*LEDs are frequently updated therefore values are nominal.

ELECTRICAL DATA - PER FOOT*					
Drive Current	120V	208V	240V	277V	347V
06L	0.048A	0.027A	0.024A	0.021A	0.016A
10L	0.073A	0.042A	0.036A	0.031A	0.025A
11L	0.087A	0.050A	0.043A	0.038A	0.030A
13L	0.100A	0.058A	0.050A	0.043A	0.035A

\*Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

RECOMMENDED LUMEN MAINTENANCE					
Ambient	Initial <sup>2</sup>	25K hr <sup>2</sup>	50K hr <sup>2</sup>	75K hr <sup>3</sup>	100K hr <sup>3</sup>
0 C (32 F)	1.02	0.96	0.94	0.92	0.90
5 C (41 F)	1.02	0.96	0.94	0.91	0.89
10 C (50 F)	1.01	0.95	0.92	0.89	0.86
15 C (59 F)	1.01	0.95	0.91	0.87	0.83
20 C (68 F)	1.00	0.94	0.89	0.84	0.80
25 C (77 F)	1.00	0.92	0.86	0.81	0.75
30 C (86 F)	0.99	0.91	0.83	0.77	0.71
35 C (95 F)	0.98	0.91	0.80	0.70	0.62

- 1 - Lumen maintenance values at 25C are calculated per TM-21 based on LM-80 data and in-situ testing.
- 2 - In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times the IESNA LM-80-08 total test duration for the device under testing.
- 3 - In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times the IESNA LM-80-08 total test duration for the device under testing.

## PHOTOMETRICS

[Back to Quick Links](#)


Luminaire photometry has been conducted by a NVLAP accredited testing laboratory in accordance with IESNA LM-79-08. As specified by IESNA LM-79-08 the entire luminaire is tested as the source resulting in a luminaire efficiency of 100%.

See <http://www.lsi-industries.com/products/led-lighting-solutions.aspx> for detailed photometric data.

### 3RSS-4-LED-06L-LF-XX-40-WHT

#### Zonal Lumen Summary



Zone	Lumens	%Luminaire
0 - 30	781.0	31%
0-40	1,239.3	49.2%
0-60	2,063.3	81.9%
60-90	455.9	18.1%
70-100	184.1	7.3%
90-120	0	0%
0-90	2,519.3	100%
90-180	0	0%
0-180	2,519.3	100%

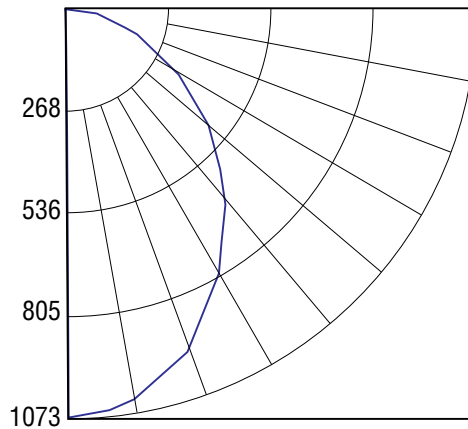





## PRODUCT DIMENSIONS

[Back to Quick Links](#)

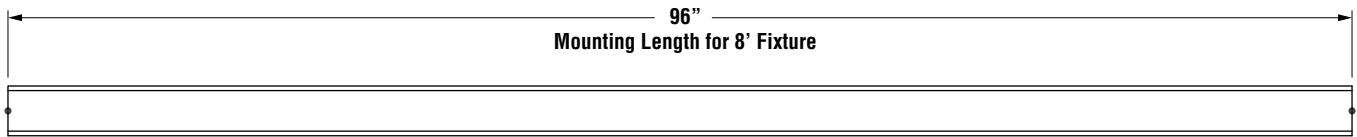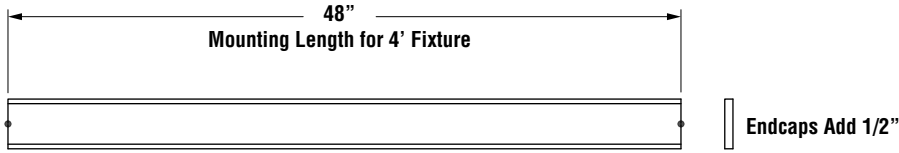


## CORNER DIMENSIONS

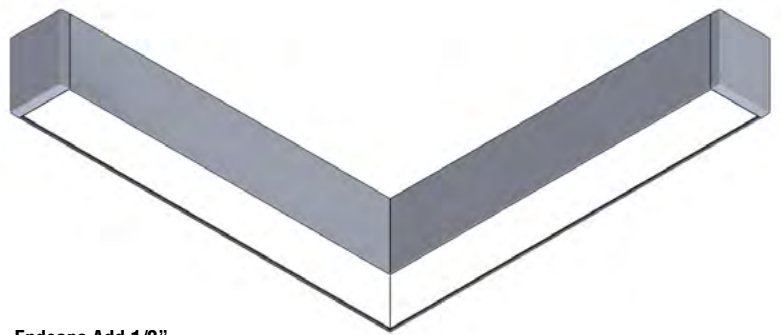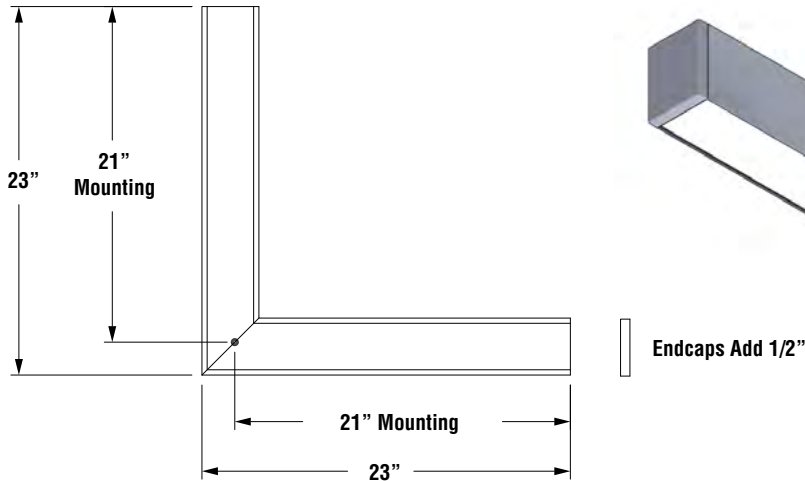


## MOUNTING


9/16" Tee Clip



15/16" Tee Clip



Screw Slot Tee Clip



Mounting Strip to J-Box  
(J-Box by Others)

