


Catalog # :

Project :

Prepared By :

Date :

LED Linear Sign/Wall Washer LXW2

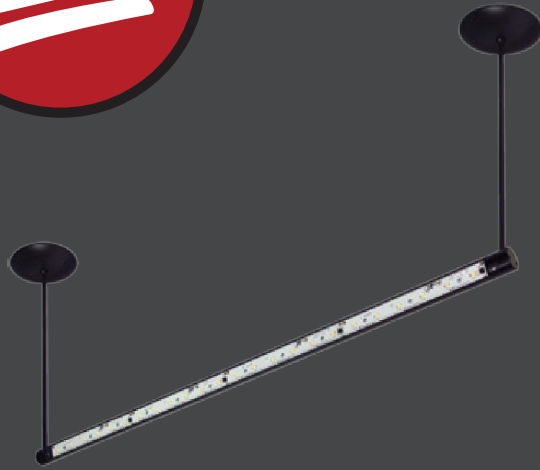

The LXW2 is a high output, decorative fixture ideal for lighting graphics or washing the wall. The LXW2 can be mounted to either the ceiling or wall. Easy adjustment allows the fixtures to be aimed for optimal performance. The small round profile virtually disappears when mounted.

Features & Specifications

Optical System


- Long Lasting Sparkle - LED light beam contains no heat, and no UV, which means no degradation in color or quality of the product under display.
- Color Consistency - Exceptional color binning +/- 5%, no visible difference from LED to LED.
- Aimable - Fixture adjusts from 0° to 350° to put the light where you want it.
- "Green" Energy-Saving - Reduces gas emissions, slashes operating costs and eliminates costly lamp disposal involving mercury waste.
- Select high-brightness LEDs. Expected life over 100,000 hours depending upon the ambient temperature of the installation location. See LSI web site for specific guidance. Available in neutral white (NW - 4000K, CRI > 85) and warm white (WW - 3500K CRI > 85). (All values nominal).
- 120° symmetrical distribution.
- 760 lumens per foot (NW) and 740 lumens per foot (WW), with an input power of 7 watts per foot.

Electrical

- Fixtures operate on intrinsically-safe 24 VDC, which means no risk to customer or associates. Separate power supply operates on 120-277 VAC, 50/60 Hz. Fixtures can be spaced apart as needed using appropriately sized 2-conductor to minimize voltage drop on long feeds from power.
- State-of-the-art driver technology designed specifically for the application is integrated on-board, providing unsurpassed system efficiency. Complies with IEC and FCC standards.
- Operating temperature: -40°C to +50°C (-40°F to +122°F).



Product Dimensions

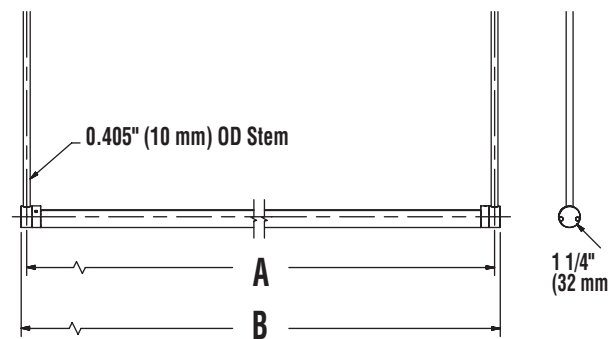

CATALOG#	A	B
LXW2 24	26.15" (664 mm)	26.8" (681 mm)
LXW2 36	38.15" (969 mm)	38.8" (985 mm)
LXW2 48	50.15" (1274 mm)	50.8" (1290 mm)
LXW2 60	62.15" (1579 mm)	62.8" (1595 mm)

Specifications and dimensions subject to change without notice.



LED Linear Sign/Wall Washer LXW2

Features & Specifications (Cont.)

Construction

- Supplied with protective clear plastic lens.
- Available in black, white and metallic silver.
- Shipping weight: 35 lbs

Installation

- Pre-assembled optical unit and mounting panel attaches to fixture housing via 4 fasteners. Driver is pre-mounted to back of optical assembly.
- Easy Installation, New or Retrofit - Mounts to either ceiling or wall.
- Separate power supply operates on 120 - 2770VAC, 50/60 HZ.

Warranty

- LSI LED Fixtures carry a 5-year warranty.

Listings

- Listed to U.S. and International safety standards. Suitable for damp locations.

Ordering Guide

TYPICAL ORDER EXAMPLE: **LXW2 36 LED WW 24 MSV 12STC**

Prefix	Length	Light Source	Color Temperature	Input Voltage	Finish	Mandatory Mounting Options
LXW2 - Linear Sign Wall Washer	36	LED	NW - Neutral White (4000K) WW - Warm White (3500K)	24 - 24 VDC	MSV - Silver BKS - Black WHS - White	12STC - 12" Stem & Canopy 24STC - 24" Stem & Canopy 48STC - 48" Stem & Canopy