



LWP

LINIARC® WALL – PERF HOUSINGS

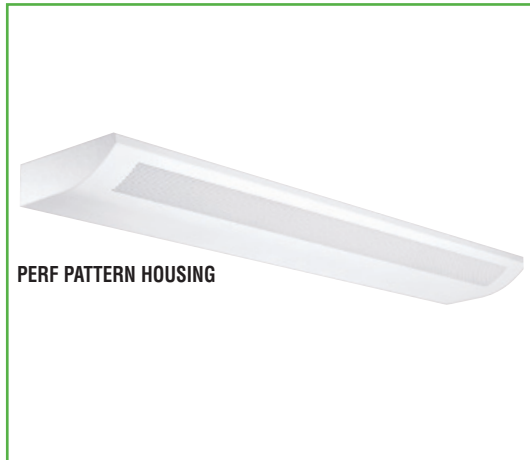

PERF PATTERN HOUSING

DIMENSIONS

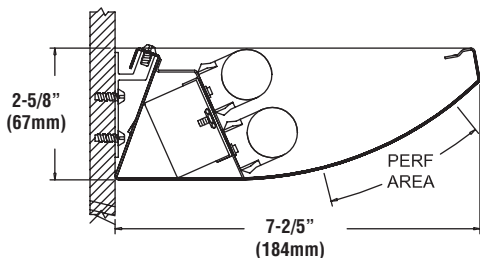

Perf Housing



PRODUCT HIGHLIGHTS

- **Three Housings Styles** - All lamp, reflector, and accessory options are available in a perf housing.
- **4-Foot Incremental Lengths** - Fixtures are available in 4, 8, or 12 foot lengths to match the handling capabilities on the job site. 4-foot increments allow the fixtures to be mounted on standard wall joists no matter how long the row.
- **Simple Installation** - Precision Aluminum hanging extrusions mount to the wall, making up for variations in wall straightness and uniformity. Light seal gasket assures no light leaks.
- **Wide Variety of Lamp Options** - Liniarc Wall is available with a choice of one or two T8, T5, or T5HO lamps.

HOUSING - Die Formed 20-gauge steel. Perforated Housing has .062" diameter holes on a .093" staggered pattern. Textured white polyester white powder coat finish.

REFLECTOR - Die formed steel, high-reflectance white polyester powder coat. Optional high-performance specular aluminum reflector available.

DIFFUSER - White acrylic overlay.

BALLASTS - Solid-state Electronic. Universal voltage (120-277), and 347. Dimming also available

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

LISTING - U.L. listed to U.S. and Canadian safety standards. Suitable for damp location.

ACCESSORIES - See Accessories page for End Cap, Hanging and Feed Options

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **LWP 8 2 54 SS5HO D EF EM11 UE**

Prefix	Length	Lamps	Type	Ballasts	Circuiting	Emer Circuiting	Options	Voltage
LWP - Perf Pattern Wall	4 8 12	1 2	32 - T8 28 - T5 54 - T5HO	SS5R - T5 Programmed Start SS5D - T5 Dimming (specify type) SS5HO - T5HO Programmed Start SS5HOD - T5HO Dimming (specify type) SSO - T8 Instant Start (<10% THD Standard) SSOR - T8 Programmed Start SSOD - T8 Dimming SSOHL - T8 High Output	S-Single D-Double ¹	Blank - None EF - Separate Individual Emergency Feed EH - Dedicated Emergency Thru-Wire Harness ES - Emergency Feed Through Main Single Circuit Harness	RAL - Custom Color (Specify - ex. RAL829) EC - Emergency Circuit Feed EM5 - Emerg. Battery (500 Lumen) EM11 - Emerg. Battery (1100 Lumen) EN5 - Batt. Pk/NiteLite (500 Lumen) EN11 - Batt. Pk/NiteLite (1100 Lumen) F - Fuse GMF - Slow-blow Fuse HPR - High Performance Specular Reflector ² LM - Lamps Installed (Specify - ex. LM735) DC - Dust Cover CEE - CEE Approved Components installed	UE - Universal Electronic (120-277V) 120 - 120V 277 - 277V 347 - 347V

1 - Double circuit not available with EM/EN option.
2 - For use with LWP only.

