

LOW PROFILE COMMERCIAL W/ UPLIGHT OPTION

WM

PRODUCT HIGHLIGHTS

- Excellent for large open retail & commercial / industrial spaces
- Low profile - 3-3/8" x 11-1/4" wide.
- Solid top reflector or with mini slots for 10% up-light (WMU version)
- Quarter turn captive fasteners for easy maintenance.
- Optimal 5" lamp spacing design.
- Available in 4-foot & 8-foot lengths

CONSTRUCTION - Housing channel crimped along sides for extra rigidity and clamping supports.

ELECTRICAL - All devices UL/CUL listed. Suitable for damp locations. Damp location emergency pack must be specified separately. Ballasts are solid-state electronic. Ballasts and lampholders replaceable without removing from ceiling. Discrete voltage must be specified for emergency pack options when wired with flex. Where lamps are included as part of the fixture, lamp CRI and color temperature must be specified.


FINISH - All metal parts painted after fabrication following treatment with phosphate rust inhibitor. Finish coating of painted reflecting housing surfaces is with white, high reflectance (minimum 92%) polyester powder. Specular reflecting housing (MWA option) is shipped with protective film applied.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.



Low Profile Commercial w/Uplight (WM) is being replaced with the new and improved Alliance High Bay (ALI)

DIMENSIONS

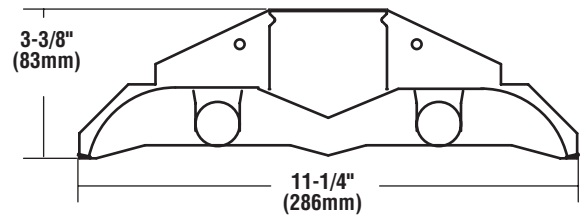

ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **WM 2 32 SSO10 EM UE**

Prefix	Housing Options	Lamps in Cross Section	Lamp Type	Ballasts	Options	Voltage
WM	Blank - Solid (no Uplight) U- Uplight	2	32 - 32W T8 48" 28 - 28W T5 45" 54 - 54W T5HO 45" Note: For tandem configurations suffix above number with "-2"	SS5R - T5 Programmed Start SS5D - T5 Dimming (specify type) SS5HO - T5HO SSOD - T8 Dimming (specify type) SSOL - T8 Low Watt SSOHL- T8 High Ballast Factor SSOHLR- T8 Program Start High Ballast Factor SSOR - T8 Programmed Start SSO10 - T8 <10% THD Instant Start	EM - Emergency Pack EM14 - Emergency Pack - 1400 lumens EMDL - Emergency Pack -Damp Location LM - Lamp Installed (specify color) ¹ PM - Prewired Plug-in Assembly (specify circuitry) JP - Job Pack ACN - Aircraft Cable Receiver Nut Using to Accept Cable Kits (order cable kits separately) ³	120 - 120V 277 - 277V UE - Universal Electronic (120-277V)

ACCESSORY ORDERING INFORMATION

Description	Order Number
Clamp Hanger	CH-11
12ft. Cable Assembly (1)	ACWM12 ²
20ft. Cable Assembly (1)	ACWM20 ²

- 1- Available with "PM" option only
- 2- Consult Factory for Row Mount Specifications
- 3- See "WM" page 2 on our website for illustrated mounting details



Project Name _____ Fixture Type _____
Catalog # _____

11/29/16
© 2016
LSI INDUSTRIES INC.