



LED LOW PROFILE WRAPAROUND - WNA




DIMENSIONS



WNA10 - NARROW BODY

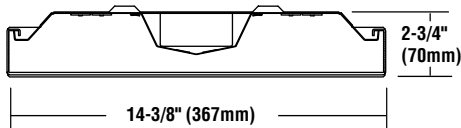

WNA14 - WIDE BODY



LIGHT OUTPUT - LED WNA									
	SS - Super Saver			HO - High Output			Watts		
	WW	NW	CW	WW	NW	CW	SS	HO	
WNA10	4475	4080	-	6745	6340	-	33	55	
WNA14	-	-	-	6785	6680	7560	-	56	
	VHO - Very High Output			Watts					
	WW	NW	CW	VHO	VHO				
WNA14	10,575	10,020	12,590	89					

LED Chips are frequently updated therefore values may increase.

PRODUCT HIGHLIGHTS

- Available in nominal 10" and 14" widths
- Economical low profile design
- Wide, even light distribution

EXPECTED LIFE - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

LEDs - Use of closely-spaced medium-power, high-brightness chips minimizes pixelation and provides uniform lens luminance. Available in Cool White (5000K), Neutral White (4000K) and Warm White (3500K) color temperatures. CRI >= 80 (CW > 70). LM-80 reports available.

CONSTRUCTION - Housing constructed of code gauge die formed cold rolled steel. Wire way cover snaps in for easy removal. End plates riveted to housing. Equipped with knockout for nipple insertion.

LENS - Frosted, impact-resistant acrylic, hingeable from either side. Exterior surface of lens bottom embossed with prisms, sides embossed with internal prisms for low-brightness illumination.

ELECTRICAL - Universal voltage (120-277 Vac) input, 50/60 Hz. Power factor > 0.9, THD < 20%, in-rush current < 15 Amps.

DRIVER - High-performance isolated driver features over-voltage, over-current and short-circuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10V dimming standard.

FINISH - All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

WARRANTY - Limited 5-year warranty.

LISTING - UL Listed to U.S. and Canadian safety standards. Suitable for damp locations. IBEW Union made in the U.S.A

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **WNA10 LED SS CW UE EM**

Prefix	Light Source	Drive Current	Color Temperature	Voltage	Options
WNA10 - Narrow Body	LED	SS - Super Saver HO - High Output	CW - Cool White (5000K) NW - Neutral White (4000K) WW - Warm White (3500K)	UE - Universal Electronic (120-277V) 347 - 347V	EM - Emergency Pack SD50 - Step Dimming to 50%
WNA14 - Wide Body		HO - High Output VHO - Very High Output			

ACCESSORY ORDERING INFORMATION (Accessories are field installed)	
Description	Order Number
Pendant Mount Kit (3/8" IP Stems)	PMK



Project Name _____ Fixture Type _____
Catalog # _____

04/12/16
© 2016
LSI INDUSTRIES INC.