



DECO digital[®]

Powered By:
NICHIA

D444-LEDM

Mini Trapezoidal Wall Pack

Digitize your light.[™]

Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	



Description

The D444-LEDM mini trapezoidal cutoff wall pack offers a sleek design and cutoff performance with a wide range of uses. It delivers the lighting needed for the exteriors of retail buildings, businesses, walkways, underpasses or door entrances.


D444-LEDM



Features

- Heavy duty two piece, die-cast aluminium housing.
- Silicone gasketing provides protection against moisture.
- Mounts directly to 3.5" octagon, or 4" square outlet box.
- .5" NPS tapped holes provided in three locations for surface conduit entry for optional photocell control.
- Dark bronze powder coated finish for impact, corrosion and UV resistance.
- Integral cast-in aluminium hinges.
- Clear tempered glass lens is thermal and shock resistant.
- Labeled UL 1598 listed for wet locations.
- Can be used as an uplight for wall washing applications.
- Dark Sky Friendly.
- Driver is fully accessible from below the ceiling or wall. Driver is wired for dimming or non-dimming.

Dimensions

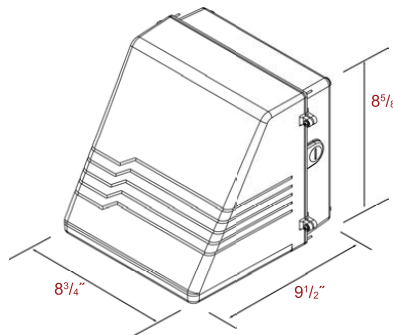

Ordering Information:

Example: (D444-LEDM-30-40-UNV-B-WH-PC)

D444-LEDM

Series	Wattage/Lumen	Color Temp.	Voltage	Optics	Finish	Option
Mini Trapezoidal Cutoff Wall Pack	15	15W/1580 ³	UNV 120-277V 347 347V 480 480V (Step-Down Transformer used for 480V Divider)	T2 Type 2 T3 Type 3 T4 Type 4 T5 Type 5	BZ Bronze ¹ BL Black WH White CU Custom ²	PC Photocell WSF Wired Single Fuse WDF Wired Double Fuse
	20	20W/2100 ³				
	30	30W/3150 ³				
	40	40W/4200 ³				
		AMB Amber 30 3000K 35 3500K 40 4000K 50 5000K ¹				

¹ Standard for fixture
² Contact factory for custom finish
³ Delivered Lumens at 5K using a T5 optic



Digitize your light.[™]

©2016 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
Note : Specifications subject to change without notice.

LED Lighting

DECO[®]

LIGHTING



DECO digital®

Powered By: NICHIA

D444-LEDM

Mini Trapezoidal Wall Pack

Digitize your light.™

Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	




LED Lighting

DECO®

LIGHTING

Amber Optical Characteristics

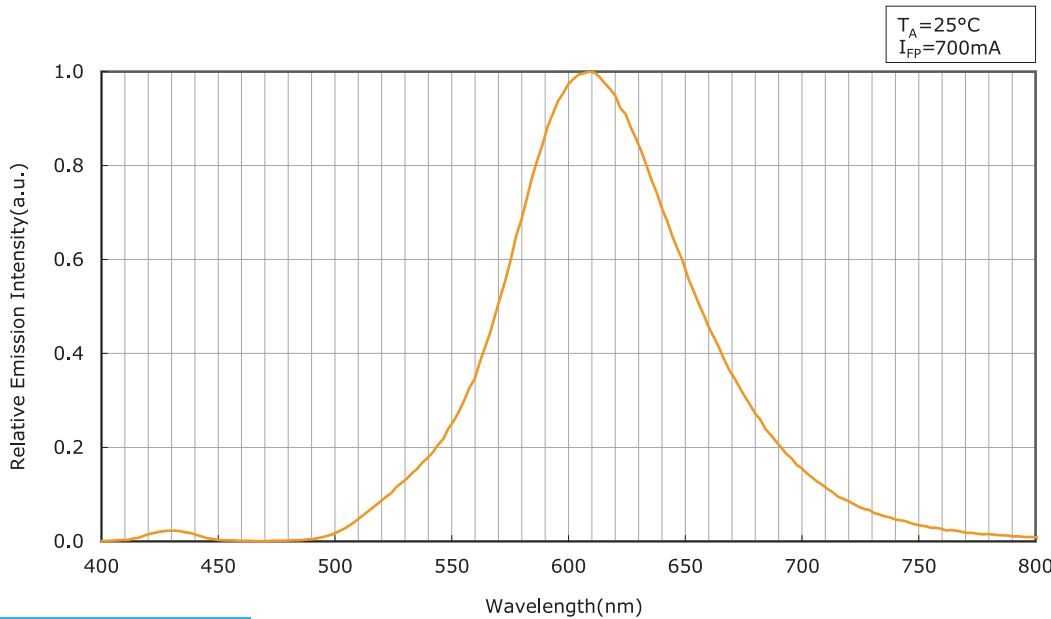

Performance Data

CRI:	80+
CCT:	Amber, 3000K, 3500K, 4000K, 5000K
Warranty:	10 yr. Limited Warranty
Dimming:	Available with 0-10V inputs dimming down to 10%
Operating Temperature:	-30° to 65°C Max Ambient
L70 Rating:	100,000+ Hours
IP Rating:	IP65
Driver Current:	700mA



Digitize your light.™